



THE UK'S LARGEST INDEPENDENT LIFT CONTROL PANEL MANUFACTURER

PB4 / 5 / 6 PUSH BUTTONS

A robust and elegant range of push buttons in a number of finishes to complement your elevator decor.

PB4 ADVANTAGES

- LED standard current 20mA (13-27mA / min-max)
- 1 N/O contact as standard
- Low profile 20mm
- Plug & Play connectors complete with terminal blocks
- 24v DC standard voltage
- Tactile and Braille standard finish
- Equality Act 2010 compliant*
- 10m mechanical life-span operations
- Meets EN 81-70 standards



PB4 Black finish with Braille

Standard stock configuration:
Red full illumination (24v) / White half illumination



PB5 Black finish non-Braille

Standard stock configuration:
Blue full illumination (24v) / White half illumination



PB6 Stainless Steel finish non-Braille

Standard stock configuration:
White full illumination (24v) / White half illumination

SURFACE GRAPHICS

Symbols: Door Close, Door Open, Alarm, Up and Down
Other options are available upon request.

RANGE FEATURES

- Full common range of numbers in stock and supporting functions available in a number of attractive finishes. There is a matching range of keyswitches, rocker switches and indicators.
- Any LED configuration can be accommodated at short notice if required.

PRODUCT CODES



- PB4R_ -3, -2, -1, 0, 1-19, A, B, DO, DC, Call, Up, Down, etc.
- PB4Y Alarm
- PB4_ 0, 1, B, G, C, 2, 3 (Main Floor)
- 2 Buzz (2 Floor Buzzer)
- 4 Buzz (3-4 Floor Buzzer)
- 8 Buzz (5-8 Floor Buzzer)
- PB4 Alarm PCB
- PB5B_ -2, -1, 0, 1-10, B, G, L, M, DO, DC, Call, Up, Down, etc.
- PB5Y Alarm
- PB5_ -1, 0, B, G (Main Floor)
- PB6W_ G, 1-9, DO, DC, Call, Up, Down, etc.
- PB6Y Alarm

NEW

PB4 / 5 / 6 BUZZ PUSH BUTTONS


A new range of push buttons incorporating the EN Buzz facility is now available.

No extra wiring on-site is required as the button comes complete with the circuit already incorporated.

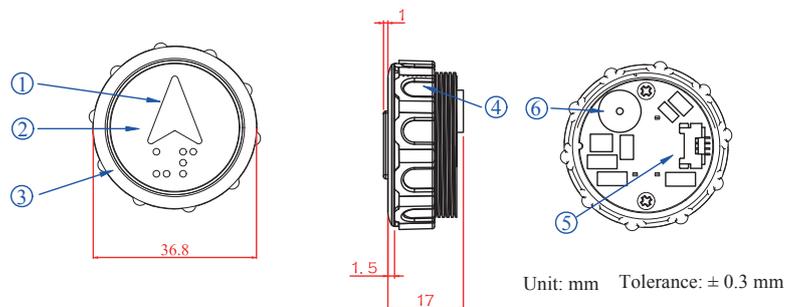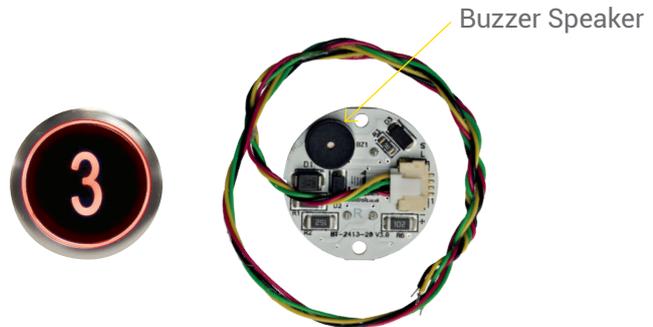

BUZZER BOARDS

The Equality Act 2010 replaced the previous antidiscrimination laws with a single Act. It simplifies the law, removing inconsistencies and making it easier for people to interpret and comply with it. It also strengthens the law in important ways to help tackle discrimination and inequality. The Disability Quick Start Guide informs you how the Equality Act 2010 changes how you should act in order to prevent and address disability discrimination and disability-related harassment when you provide goods, facilities and services to the public, for example as a residential care home, community shop or after school club. These parts of the Act came into effect on 1 October 2010.


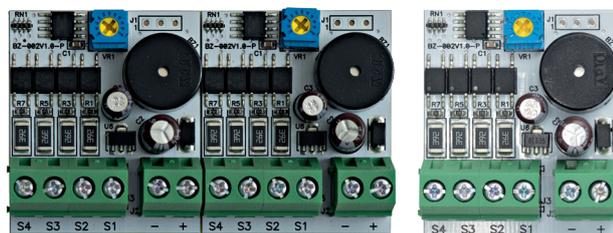


8 way Buzzer Board



4 way Buzzer Board

Not required when using Lester Controls' Flexibus serial push system.

PB4 SERIES (BRAILLE)
Patterns for cutting No.

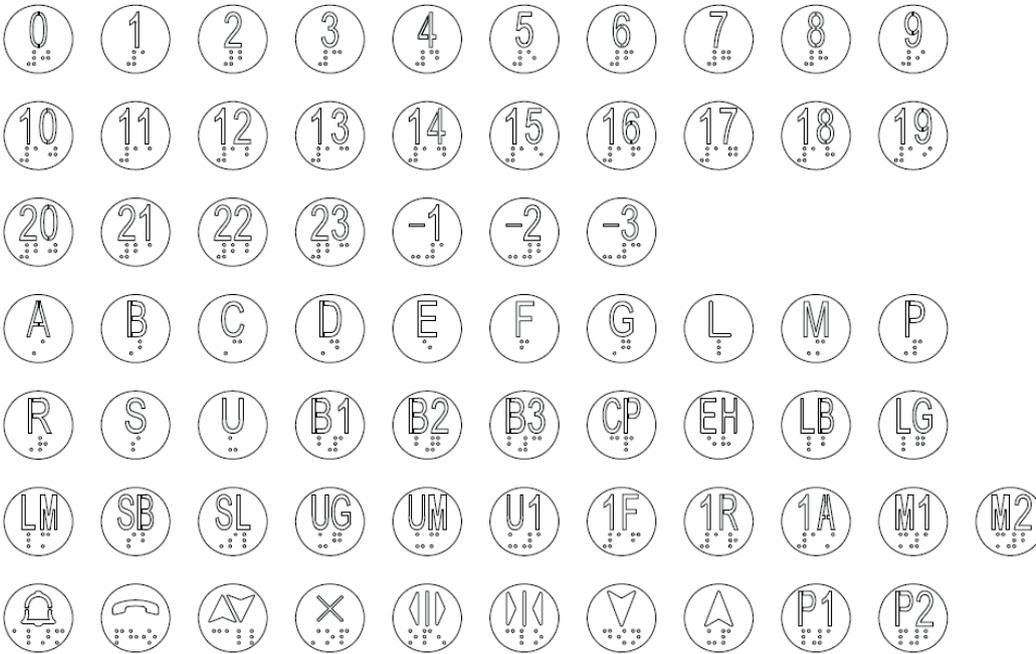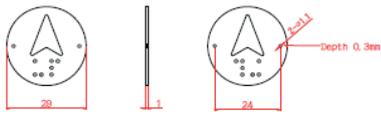

PB5/6 SERIES
Patterns for cutting No.

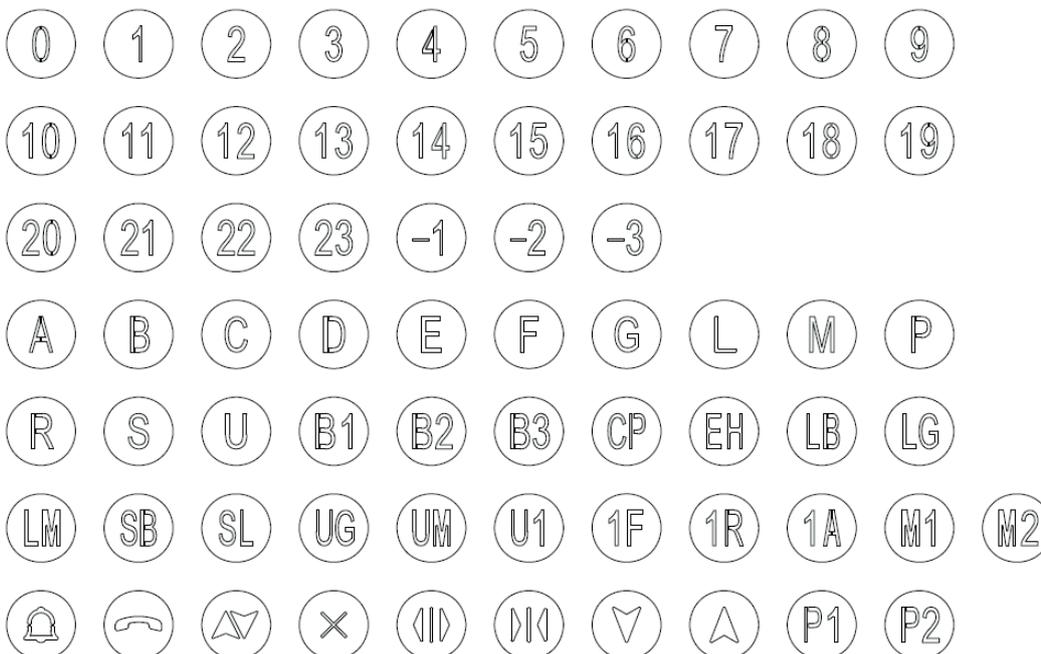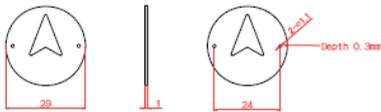


GENERAL

- Installation location: On the car operation panel or hall station
- Function: For elevator calling for hall position or car position

OPERATION

- Fix the units on the car operation panel or hall station
- Follow the wiring diagram to connect the wires
- Check the short circuit between the wires multi-meter
- Power on and press the button to confirm it works normally
- The installation is finished after the above procedure

DIMENSION DIAGRAM

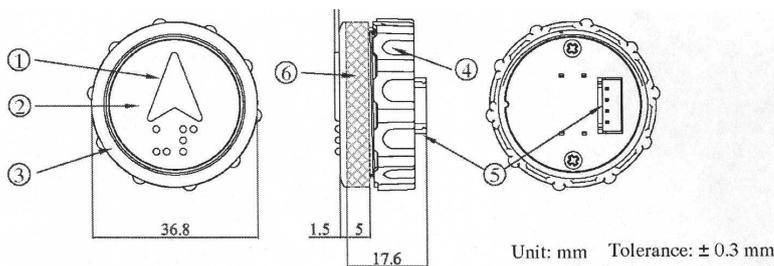


TECHNICAL SPECIFICATION

Standard Voltage	DC24v
Voltage Range	DC18v ~ DC30v
Standby Consumption	Power 1.8mA
	Current 1.8mA
In Operation Consumption	Standard voltage 20mA
	Lowest voltage 13mA
	Highest voltage 27mA
Push Strength	400g ± 50g
Life-Span	10million
Display Type	LED
Colour	In standby white
	In operation red/blue/white
Weight	15.5g

All information is for guidance only, E & OE
 ©Copyright 2021, Lester Controls Systems
 Ltd, All rights reserved

STUD OPENING DIAGRAM




- Plastic symbol slice (Transparent brown PP)
- 1T Hairline stainless steel
- Hairline stainless steel board
- Fixed cover (ABS)
- Connector
- Bushing (raised 5mm) for exit floor

DOP WIRING DIAGRAM

** (DOP) YELLOW — BLACK (CPF)**

** (DOPI) GREEN — RED (CAC)**

PUSH WIRING DIAGRAM

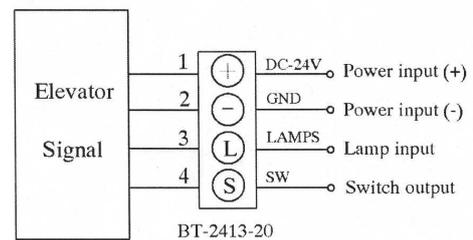

3-Wire Push Wiring

CAC/LAC Red
 LPF/CPF Black
 LP1/CP1etc Yellow & Green (wire together)

4-Wire Push Wiring

CAC/LAC Red
 LPF/CPF Black
 Push return Yellow
 Lamp return Green