2 WIRE INDICATOR WIRING DIAGRAM (INCLUDING BINARY ENCODER)

Linking Wires from INDICATOR to ENCODER Board (when required)

NOTES
1) Use binary encoder when more than 6 floors are needed.

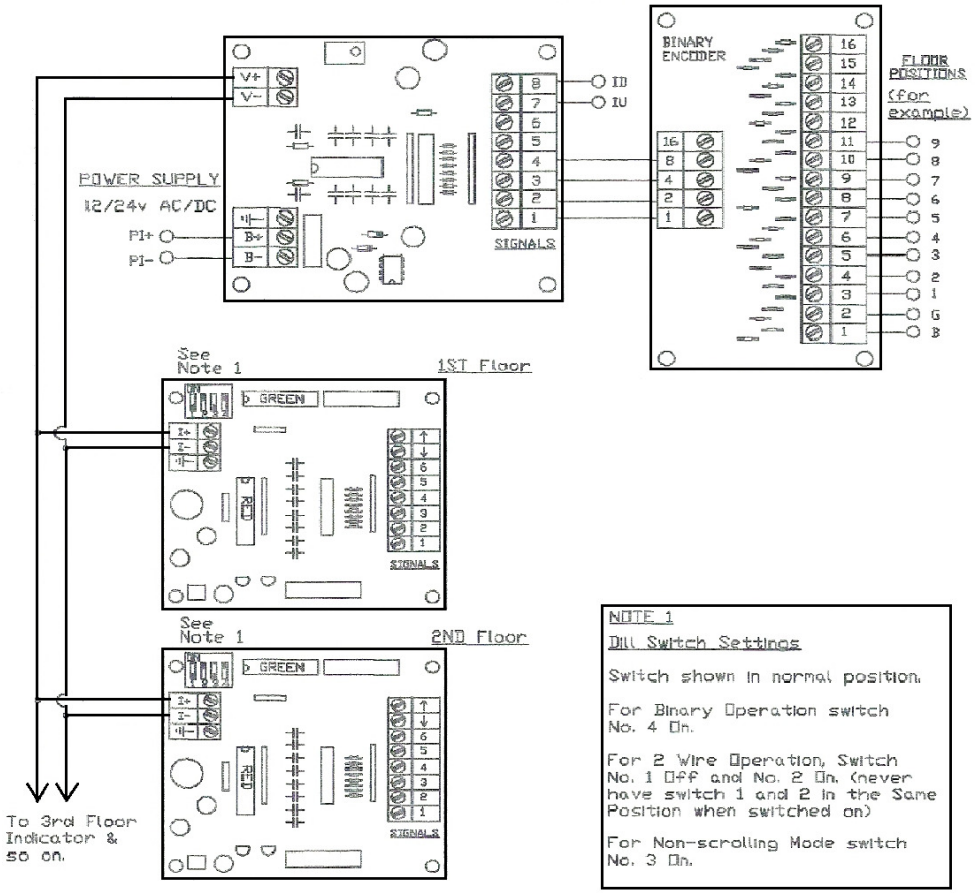

NOTE 1

Dill Switch Settings

Switch shown in normal position.

For Binary Operation switch No. 4 On.

For 2 Wire Operation, Switch No. 1 Off and No. 2 On. (never have switch 1 and 2 in the Same Position when switched on)

For Non-scrolling Mode switch No. 3 On.

date			TITLE-:	LESTER CONTROL SYSTEMS LTD Unit D, 18 Imperial Way Croydon, Surrey CR9 4QP Tel-: 020 8288 0668 Fax-: 020 8288 0667 Email-: info@lestercontrols.co.uk	Company:
editor					Order No.:
check					Floor Designation: